

Scan On Your Smartphone
For Operating Instructions

CONTACT US

A NEW PRODUCT IN OIL TANK REMOVAL

Units Are Constructed
From High Grade
Structural Aluminum
Ready To Use Upon
Delivery


No Assembly Required

One Year Limited Warranty

The Oil Tank Crank will repair, without charge, any defects due to faulty materials or workmanship for one year from the date of purchase. This warranty does not cover part failure due to normal damage caused where repairs have been made or attempted by others.



More Info :
info@OilTankCrank.com
www.OilTankCrank.com

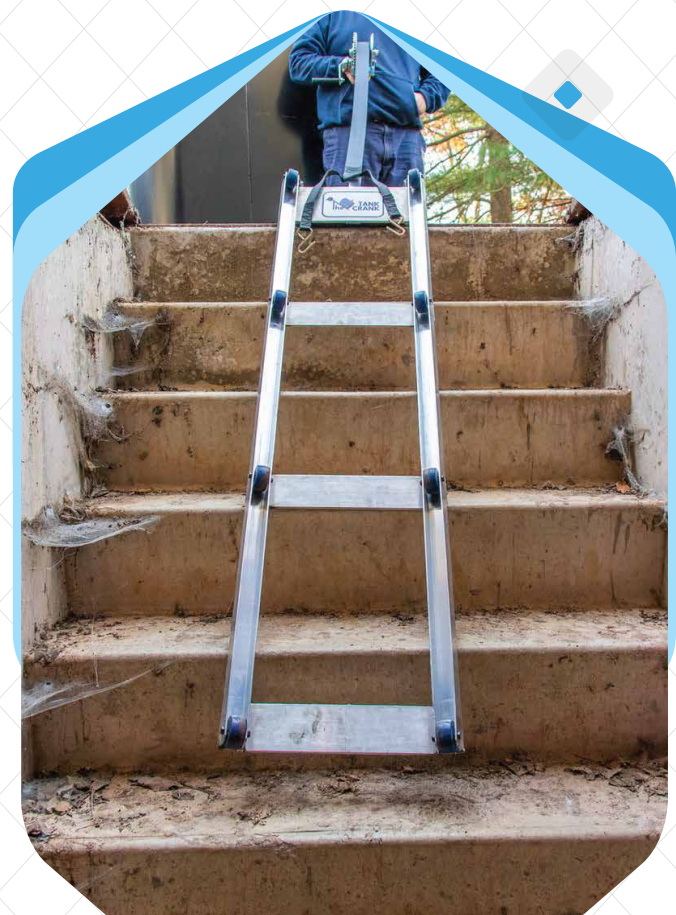

The Oil Tank Removal System

LOW PROFILE DOLLY



To make the oil tank removal process even easier we designed this dolly specifically for transporting the oil tank to and from The Oil Tank Crank. The dolly has a 1200 pound load capacity under normal use conditions.

ADJUSTABLE KICKSTAND



The Adjustable Kickstand can be placed under the oil tank after it has been raised to the top of the stairs to allow extra room to detach the tank from The Oil Tank Crank. This also helps to place the oil tank onto the Low Profile Dolly to finish the tank removal process.



THE OIL TANK CRANK

Designed for efficiency and safety, this is the main device used for removing residential oil tanks easily through a cellar hatchway. No more back breaking lifting. Simply hook the tank onto the unit and crank.

The Oil Tank Crank is lightweight and easily fits into any service van for your convenience on your next oil tank removal.

THE OIL TANK CRANK EXTENSION

No cellar staircase? No Problem! The Extension is designed to easily attach to your Oil Tank Crank to allow for the oil tank to be removed from almost any staircase.

